
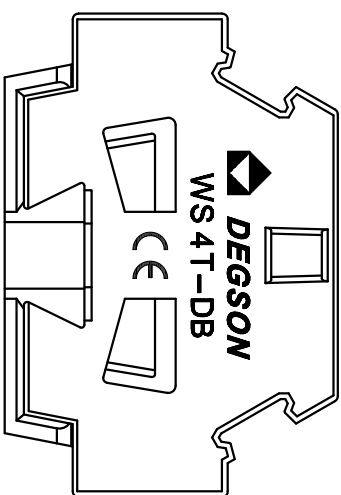
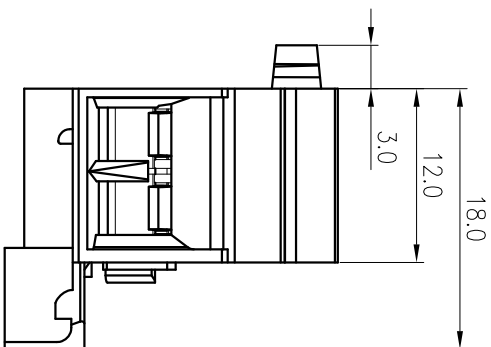
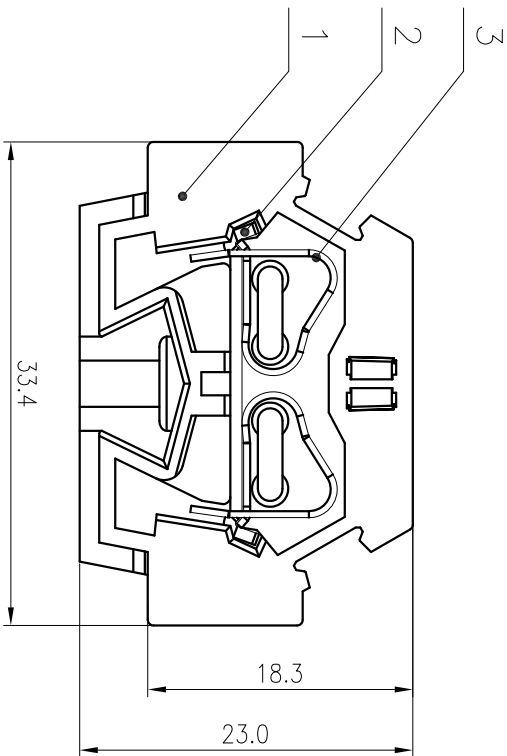


未注公差/General Tolerances(mm)		0.1/10	
0	>3	>5	>10
~	3	~	~
~	6	~	10
~	10	~	18
~	18	~	30
~	30	~	50
~	50	~	80
~	80	~	120
~	120	~	180
~	180	~	250
~	250	~	315
~	315	~	400
~	400	~	500
~	>500	~	>500
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		

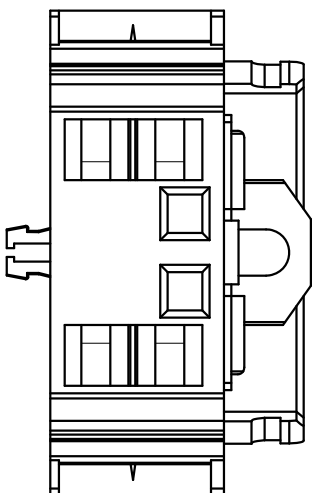

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	/
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	630/32	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
扭矩/扭力/Torque Tightening(N·m/Lb.in)	/	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.0/28~12		
间距/Pitch(mm)/线数范围/Poles	12.0/XXP		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL			

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.04.04
 CHKD: Mao J 2020.04.04
 DRT:Wang LX 2020.04.04

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: WS4T-DB-C01

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
3	Spring	Stainless steel	
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRT	DATE
1				

1 2 3 4 5 6