


精度等级/General Tolerances(mm)		尺寸/Dimensions										公差/Tolerance	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
$\pm 0.12$ $\pm 0.18$ $\pm 0.22$ $\pm 0.26$ $\pm 0.31$ $\pm 0.37$ $\pm 0.57$ $\pm 0.80$ $\pm 0.93$ $\pm 1.05$ $\pm 1.15$ $\pm 1.60$ $\pm 2.20$ $\pm 2.50$													

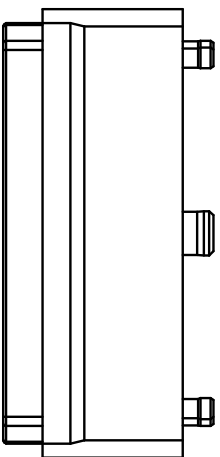

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	800/24	/	/
额定电涌电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/28~12(Sol)		
厚度/Pitch(mm)/线数范围/Poles	10.00		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.05.29	NAME:	WS2.5T-MID-CO-01P-1Y-00A(H)
CHKD:	Mao J 2020.05.29	DRAWING NO.:	WS2.5T-MID-CO-C01

3	Spring	Stainless steel	/
2	Current carrier	Copper	Sn Platte
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
1			

REV	ECN	DESCRIPTION	DRAFT	DATE
SIZE: A4	SCALE: 2:1	TYPE: CUSTOMER DRAWING		

DEGSON<sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司

DRAFT: ZhengQG 2020.05.29

1 2 3 4 5 6