
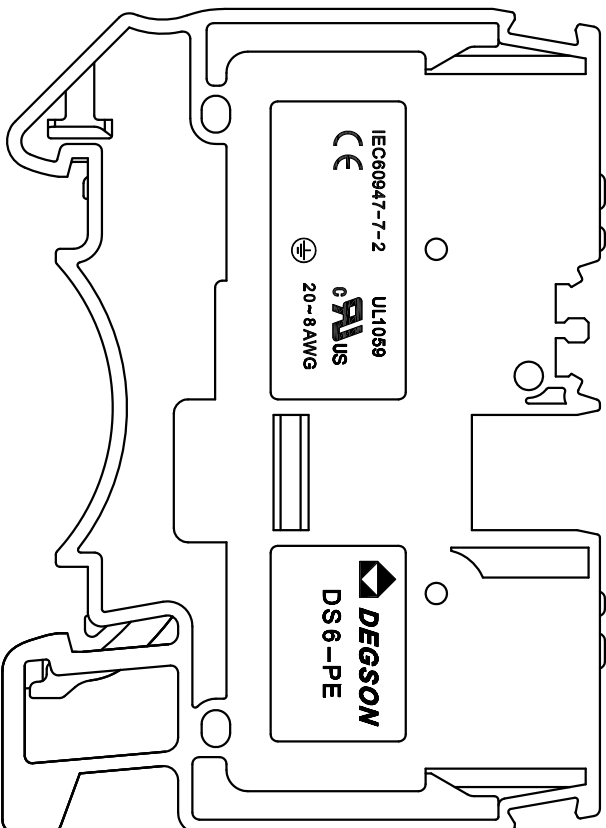


58.0

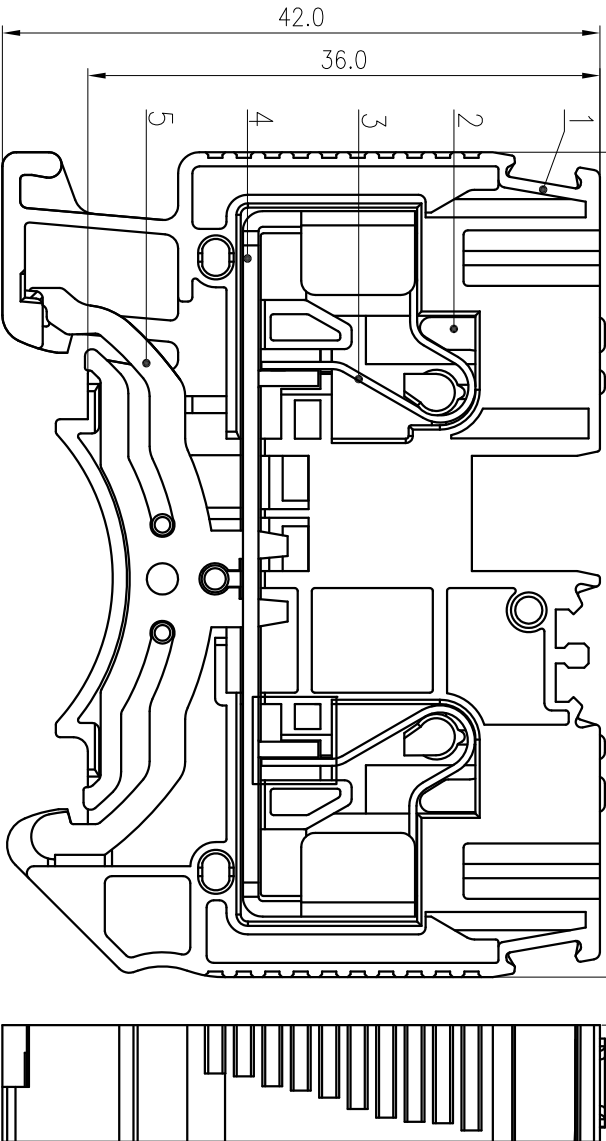

公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>10	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
级/Pollution Degree	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线在范围(硬线柔软线)/Wire Range(rigid and Flexible)(mm <sup>2</sup> /AWG)	0.5~6.10(Sol)/20~8		
可距/Fitch(mm)	8.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /  
SURFACE: /

MAT NO.: /  
STATUS: /  
APPD: Li GL 2020.06.01  
CHKD: Mao J 2020.06.01  
DRT: Chen K 2020.06.01

NAME: **DEGGSON** 宁波高松电子有限公司  
NINGBO DEGGSON ELECTRICAL CO., LTD

DRAWING NO.: DS6-PE-C01  
SCALE: 2:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding	Copper alloy	Sn plated
4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94 V-0
1	Housing	PA66	UL94 V-0

REV	ECN	DESCRIPTION	DRT	DATE
1				

SIZE	TYPE	SCALE	SHEET
A4	CUSTOMER DRAWING	2:1	1/1