



未注公差/General tolerances(mm)		公差/General tolerances(mm)											
0	>3	75	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	5	10	18	30	50	80	120	180	250	315	400	500	~
E0.12	E0.18	F0.22	F0.26	F0.31	F0.37	F0.57	F0.80	F0.93	F1.08	F1.15	F1.60	F2.20	F2.50

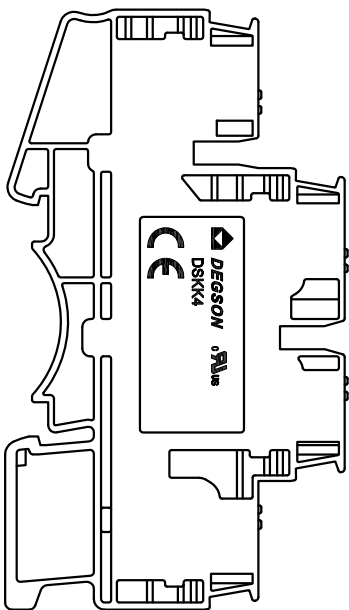

6.2

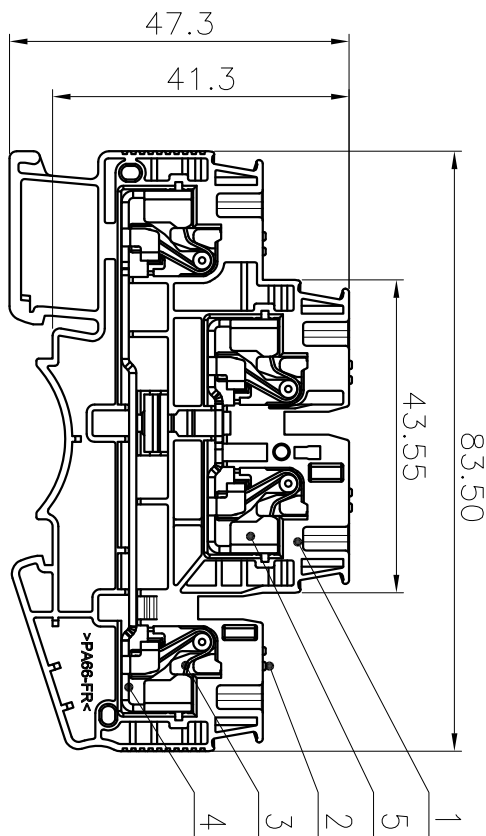

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/28	300/28	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	/	/
级/Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6.0	/	/
额定扭矩/Torque Tightening(N·m/Lb·in)			
绞合范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4&6(SOL)/24~10		
间距/Pitch(mm)	6.2		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.04.02
 CHKD: Mao J 2020.04.02
 DRT:Wang LX 2020.04.02

DEGSON® 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DSKK4-01P-1Y-00A(H)
 DRAWING NO.: DSKK4-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRT	DATE
5	Current carrier 2	Copper	Sn Plated					
4	Current carrier 1	Copper	Sn Plated					
3	Spring	Stainless steel						
2	Button	PA66-GF	UL94V-0					
1	Housing	PA66	UL94V-0					

1 2 3 4 5 6