
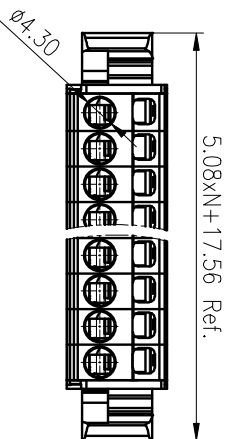
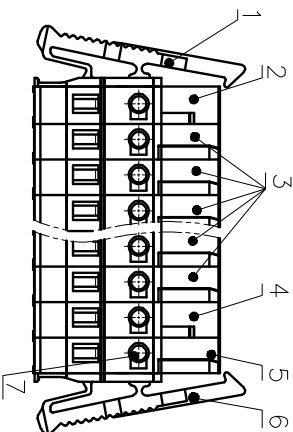

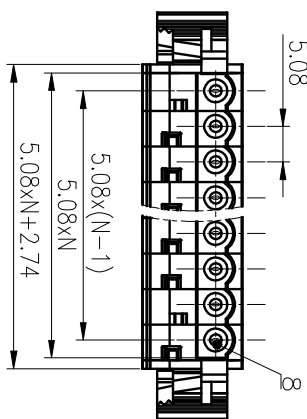
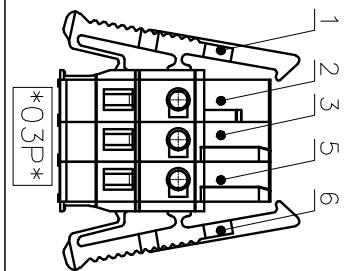


FOR-1754 Rev.1.1

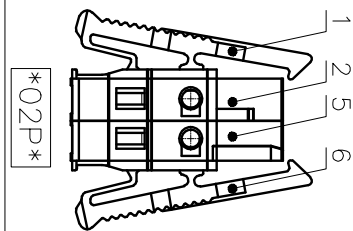

Pitch Range		Nominal Dimension		Range		
mm	In	mm	In	mm	In	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 10	TO 24	TO 10	TO 60	TO 100	TO 150	≤
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30
						±2°

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DRAWING NO: BEDGKG-5.08-1000-C02	
APPD:		TYPE: CUSTOMER DRAWING	
CHKD:		SCALE: 1:1	
DRT: XieZhp 2020.06.17		REV TO	
REV	ECN	DRFT	DATE
1	2	3	4
DESCRIPTION		SIZE: A4	1/1

8	Clamp	Copper alloy	Sn Plated
7	Spring	Stainless Steel	
6	Cover 2	PA66	UL94V-0
5	Side Housing 2	PA66	UL94V-0
4	Middle Housing 2	PA66	UL94V-0
3	Middle Housing 1	PA66	UL94V-0
2	Side Housing 1	PA66	UL94V-0
1	Cover 1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:		B	C
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15/150/15/300/10		D
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	4	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE 428C		