


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw 2	Steel	M2.5/Zn Plated
5	Screw 1	Steel	M3/Zn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	320/18
额定脉冲电压(KV)/Rote Impulse Voltage(KV)	/	/	4
额定扭矩/Torque Tightening(N·m/Lbin)	M3: 0.5/4.43	/	
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm² AWG)	1.0~2.5/28~12	/	
间距/Pitch(mm)/极数/极数/Poles	5.08/N=02~22P	/	
剥线长度/Stripping length(mm)	6	/	
工作温度范围/Operating temperature(°C)	-40~+105	/	
符合RoHS环保要求/Conform to RoHS	Yes		

02P: Clasp on the left from this view

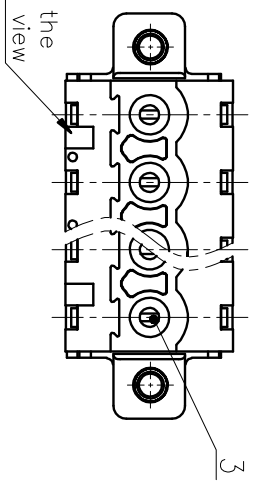

MATERIAL: /

SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

宁波德松电子有限公司

NAME: ZEDGKBM-5.08-XXP-1Y-1000A(H)

DRAWING NO.: ZEDGKBM-5.08-C05

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

APPD: Lon CHH 2020.05.19

CHKD: Gong YZh 2020.05.19

DFT: ZX 2016.09.14

STATUS: /

SIZE: A4

REV	ECN	DESCRIPTION	DRAFT	DATE
1				