


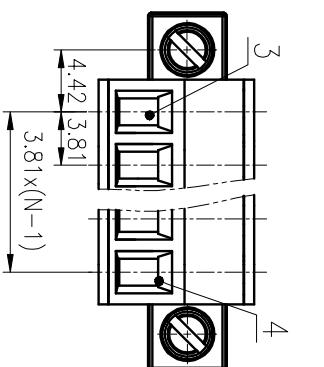


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

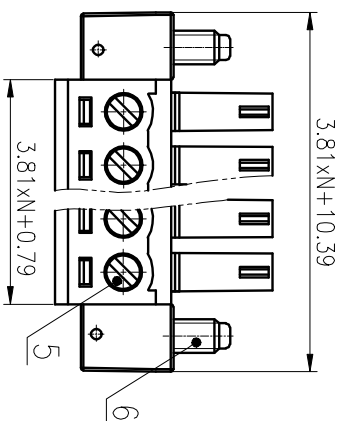

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper Alloy	Sn Plated
4	Cage	Copper Alloy	M2/Ni Plated
5	Screw 1	Steel	M2/Zn Plated
6	Screw 2	Steel	M2.5/Zn Plated

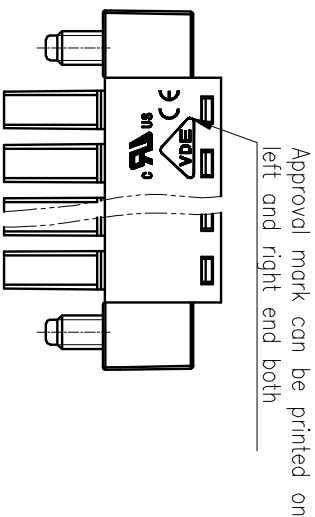

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	250/7		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5		
额定扭矩/扭矩 Tightening(N·m)/Lbin)	M2, 0.2/1.77		
导线直径(裸线/绞线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGKM-3.81-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	SHEET
1	2	3	4	5	6	1/1	T1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	SHEET
1	2	3	4	5	6	1/1	T1