


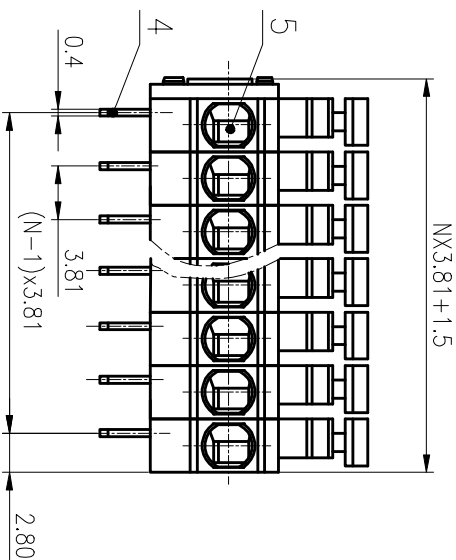
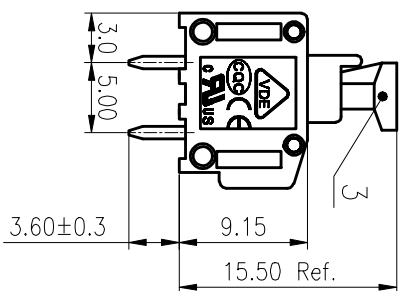


公差等级/General	Tolerances(mm)										公差等级/General			
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	0.1/10	
~	~	~	~	~	~	~	~	~	~	~	~	~		
3	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
±Z														

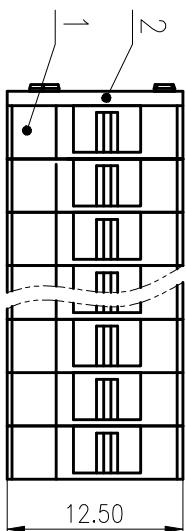

PCB LAYOUT

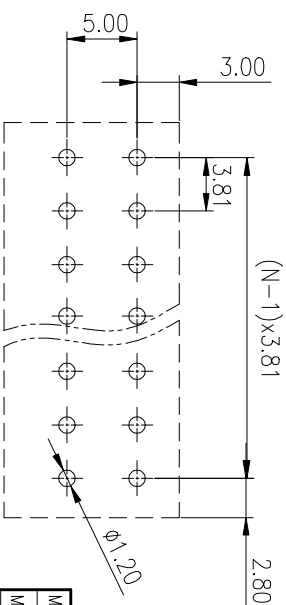

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Pin header	Copper alloy	Sn Plated
5	Clamp	Stainless steel	/

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD: LiGL	2020.05.27	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mek	2020.05.27	DG235-3.81-XXP-1Y-00A(H)	
DRAFT: MSh	2020.05.27	DRAWING NO.:	DG235-3.81-C02
SIZE: A4	mm / inch	TYPE:	CUSTOMER DRAWING
		SCALE:	2:1
			SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/5	150/5	300/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/10	/
工频耐压/Withstanding Voltage(V/1Min)	AC2000		
线径范围(裸线铜线)/Wire Range(rigid and flexible)(mm² /AWG)	0.5~1.0, 1.5(Sol)/20~18		
间距/Pitch(mm)/线径范围/Poles	3.81 / N=02~24P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

DG235-3.81-XXP-1Y-00A(H)

REV	T0
1	1/1