
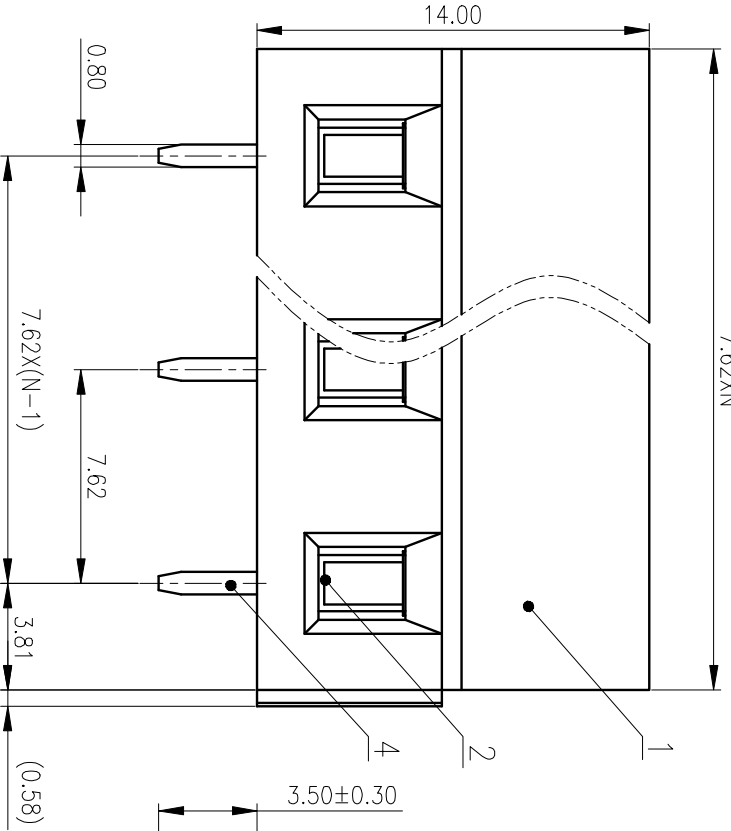
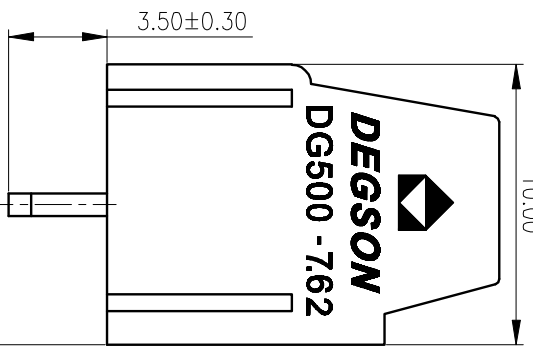


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z	±Z	±Z

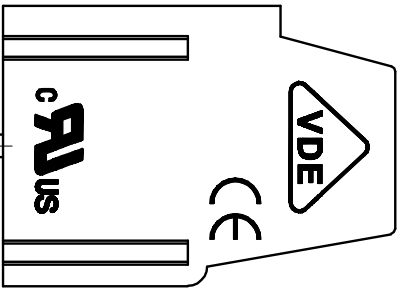

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/70
IEC 标准 /IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	450/18	/
工频耐压/Withstanding Voltage(V)/min	/	AC2500	/
拧紧扭矩/Torque Tightening(N·m/Lb.in)	/	M3, 0.5/4.43	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/30~12		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~16P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	/
SURFACE:	/

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: DG500-7.62-XXP-1Y-00A(H)

MAT NO.:	/
STATUS:	/
Appd: LiGL	2020.06.11
CHKD: Mek	2020.06.11
DFT: LuoXM	2020.06.11

DRAWING NO.:	DG500-7.62-C01
TYPE:	CUSTOMER DRAWING
SCALE:	4:1
SHEET	1/1

REV	ECN	DESCRIPTION	DFT	DATE
-----	-----	-------------	-----	------

1 2 3 4 5 6