

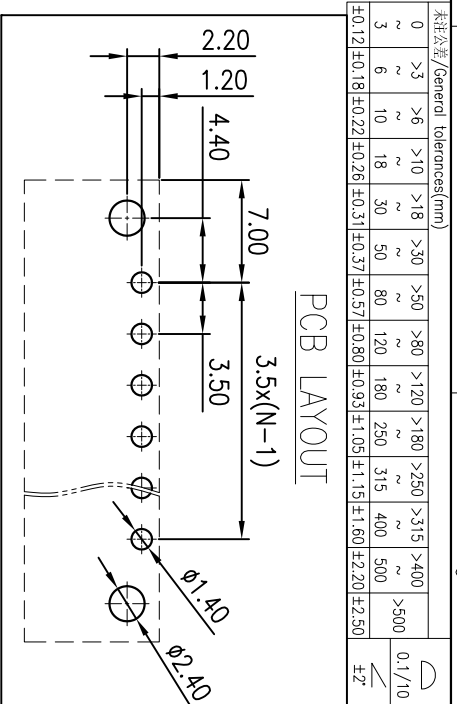
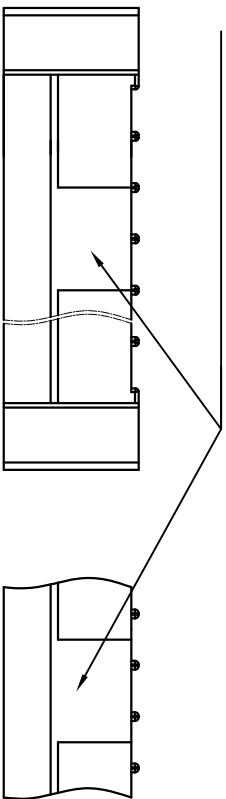


The pad is positioned centrally above the existing positions

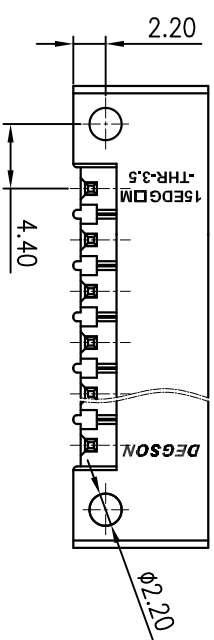

公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>50
~	~	~	~
3	~	30	~
6	~	50	~
10	~	80	~
18	~	120	~
30	~	180	~
50	~	250	~
80	~	315	~
120	~	400	~
180	~	500	~
250	~	~	~
315	~	~	~
400	~	~	~
500	~	~	~
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.93
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50

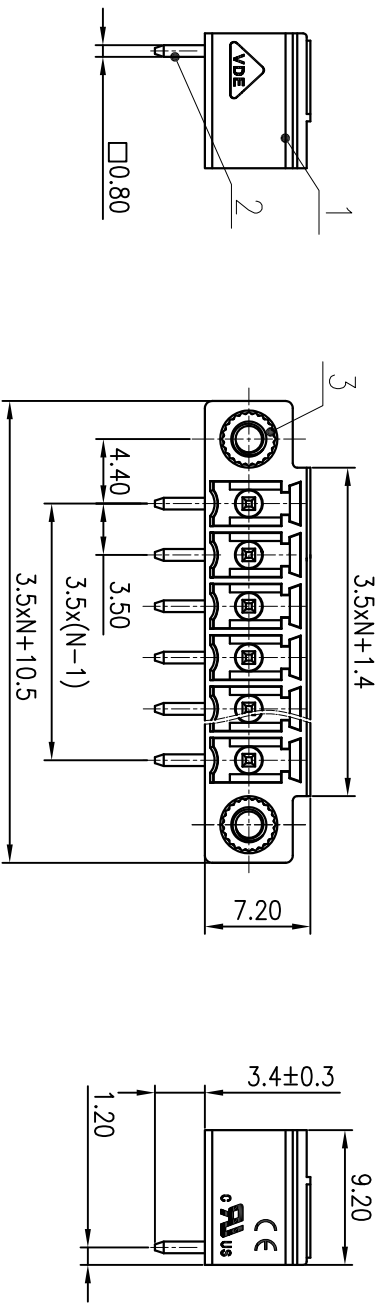

3	Screw cap	Copper alloy	
2	Pin	Copper	Sn Plated
1	Housing	Thermoplastic	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B			
额定电压/电流/Rated Voltage(V)/Current(A) 300/8			
IEC 标准/IEC Standard: 300/8			
过压类别/Overvoltage Category/污染等级/Pollution Degree II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 250/8			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 2.5			
间距/Pitch(mm)/线数范围/Poles 3.5/N=02~12P			
使用温度范围/Operating temperature(°C) -40~+130			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL:

SURFACE:

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGRM-THR-3.5-XXP-1Y-10A(H)

APPD: Lan CHH 2020.05.25

CHKD: Yu JZh 2020.05.25

DRAFT: Li Zh 2020.05.25

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE	SCALE	SHEET
1					A4	2:1	1/1