



标注公差/General Tolerances(mm)		
0	>3	>180 >250 >315 >400 >500
~	~	~
3	6	10 18 30 50 80 120 180 250 315 400 500
~	~	~
±0.12	±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50	±2.50
		±2



文管中心
研发专用
2020.03.24
(仅限内部使用, 对外无效)

PCB LAYOUT

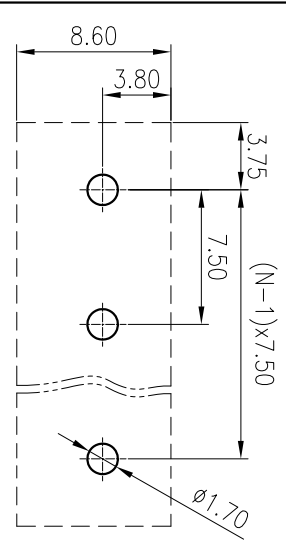

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
UL 标准/UL Standard:			D
额定电压/Rated Voltage(V)	Current(A)	300/15	/
VDE 标准/VDE Standard:			300/10
过压类别/Overvoltage Category/污秽等级/Pollution Degree		III/3	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	400/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数范围/Poles		7.50/N=02~12P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:	/
MAT NO.:	/
STATUS:	/
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	LmCHH 2020.03.24
CHKD:	GongYzh 2020.03.24
DRAFT:	LTY 2020.03.24
DRAWING NO.:	10001581
TYPE:	CUSTOMER DRAWING
SCALE:	2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

