

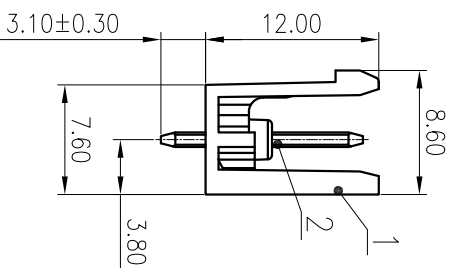
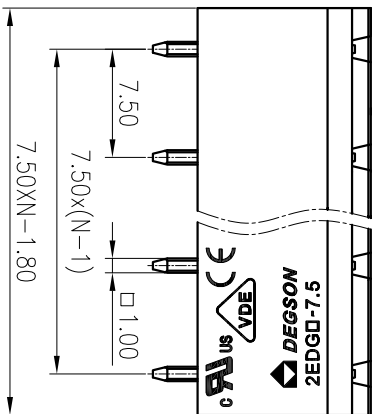


公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0	
~	~	~	~	~	~	~	~	~	~	~	~	~	~		
3	6	10	18	30	50	80	120	180	250	315	400	500	>500		
E0/T2	H0/L8	H0/L8	H0.22	H0.26	H0.31	H0.37	H0.57	H0.80	H0.93	H1.05	H1.15	H1.60	H2.20	H2.50	HZ

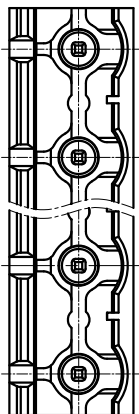

PCB LAYOUT
7.50X(N-1)

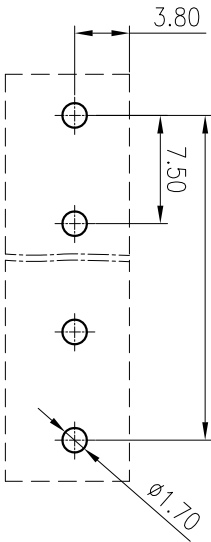

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/Rated Voltage(V)		300/15	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级		III/2	
额定电压/电流/Rated Voltage(V)/Current(A)		400/20	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4.0	
间距/Pitch(mm)/线数范围/Poles		7.5/02~12P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS Yes			

SURFACE: /

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGV-7.5-XXP-1Y-100A(H)

MATERIAL:	/	NAME:	
MAT NO.:	/	DRAWING NO.:	2EDGV-7.5-C01
STATUS:	/	TYPE:	CUSTOMER DRAWING
APPD: LanChH2020.05.26		SCALE:	2:1
CHKD: GongYZZ2020.05.26		REV	T1
DRFT: HHJ 2015.07.27		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				
5				
6				