
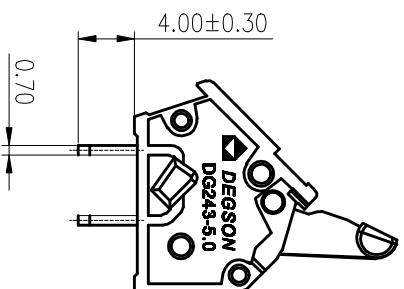


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

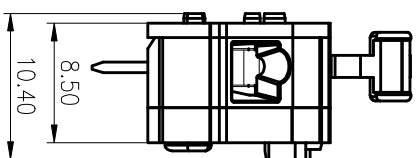

ITEM	NAME OF PART	MATERIAL	NOTES
6	Clippboard	PA66	UL94V-0
5	Button	POM	UL94HB-
4	Spring	Stainless steel	/
3	Pin header	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/ 污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	750/17	/
工频耐压/Withstanding Voltage(V/1min)		AC3000	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~2.5/28~12	
间距/Pitch(mm)/线数范围/Poles		7.5 /N=01~26P	
剥线长度/Stripping length(mm)		5~6	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.10
 CHKD: MGEK 2020.06.10

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
DG243-7.5-XXP-1Y-00A(H)

DRAWING NO.: DG243-7.5-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

A B C D

1

2

3

4

5

6