
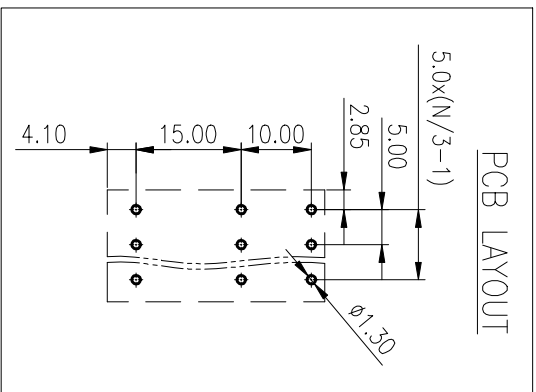
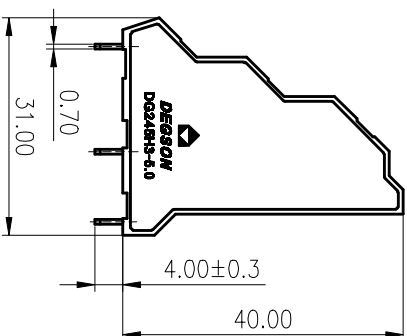
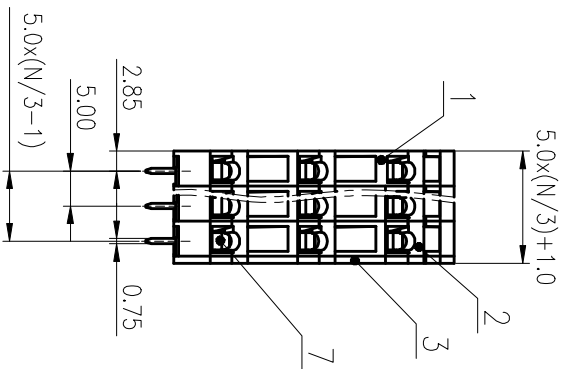
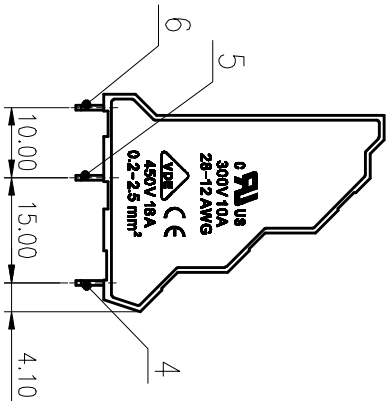


精度等级/General Tolerances(mm)		尺寸/Dimension												
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													±Z	



5.0x(N/3-1)

5.0x(N/3-1)

ITEM	NAME OF PART	MATERIAL	NOTES
7	Spring	Stainless steel	/
6	Pin header3	Copper	Sn Plated
5	Pin header2	Copper	Sn Plated
4	Pin header1	Copper alloy	Sn Plated
3	Cover	PA66	UL94V-0
2	In-housing	PA66	UL94V-0
1	Side-housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准 /IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	450/18	/
工频耐压/Withstanding Voltage(V/1Min)	/	AC2500	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.0/N=03~72P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.10
 CHKD: MoEK 2020.06.10
 DRT: CLB 2015.11.27

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
DG245H3-5.0-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 1:1	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET
									1/1

DWG NO.: DG245H3-5.0-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1