
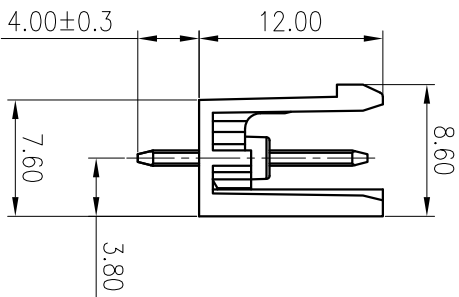
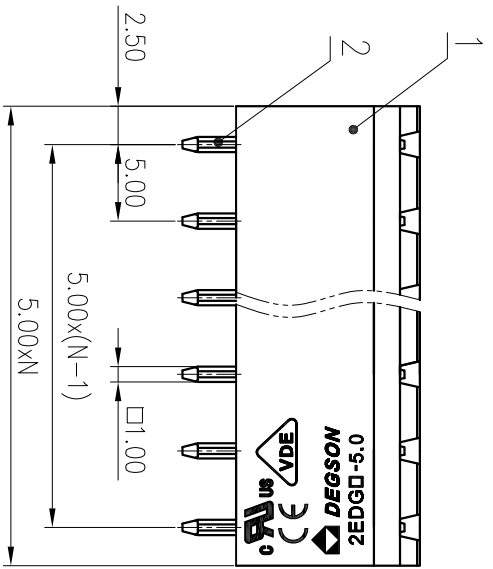
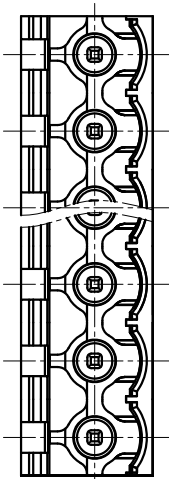


PCB LAYOUT

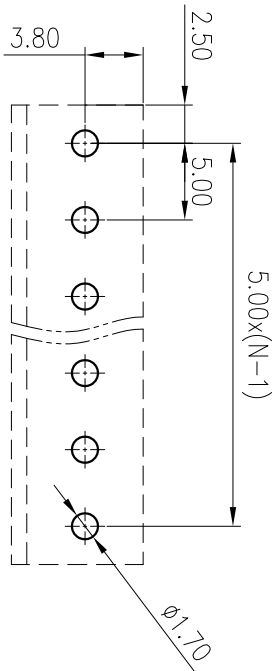

公差/General Tolerances(mm)	
0	>3
~	~
3	6
~	10
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.57
±0.80	±0.93
±1.05	±1.15
±1.60	±2.20
±2.50	±2.50
0.1/10	±2

文管中心
 研发专用
 2020.05.13
 (仅限内部使用, 对外无效)

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/15 / / 300/10			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等级/ Pollution Degree III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) / / 320/20 / /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / / / 4 /			
间距/ Pitch(mm)/线数范围/Poles 5.0/N=02~24P			
使用温度范围/Operating Temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: /
SURFACE: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.05.13

CHKD: GongYzh 2020.05.13

DRFT: YrNDK 2020.05.13

DRAWING NO.: 10001957

NAME: 2EDGV-5.0-XXP-1Y-100A(H)

DEGSON
 NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4	SCALE: 2:1	TYPE: CUSTOMER DRAWING	REV: T0