
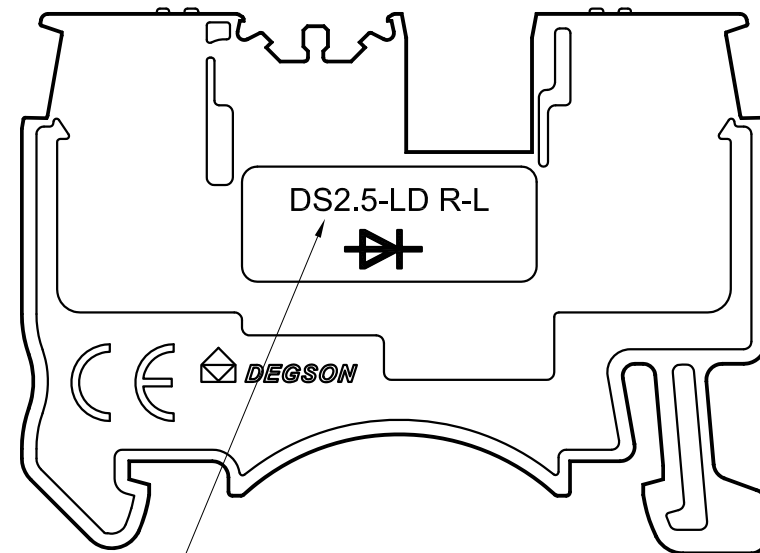
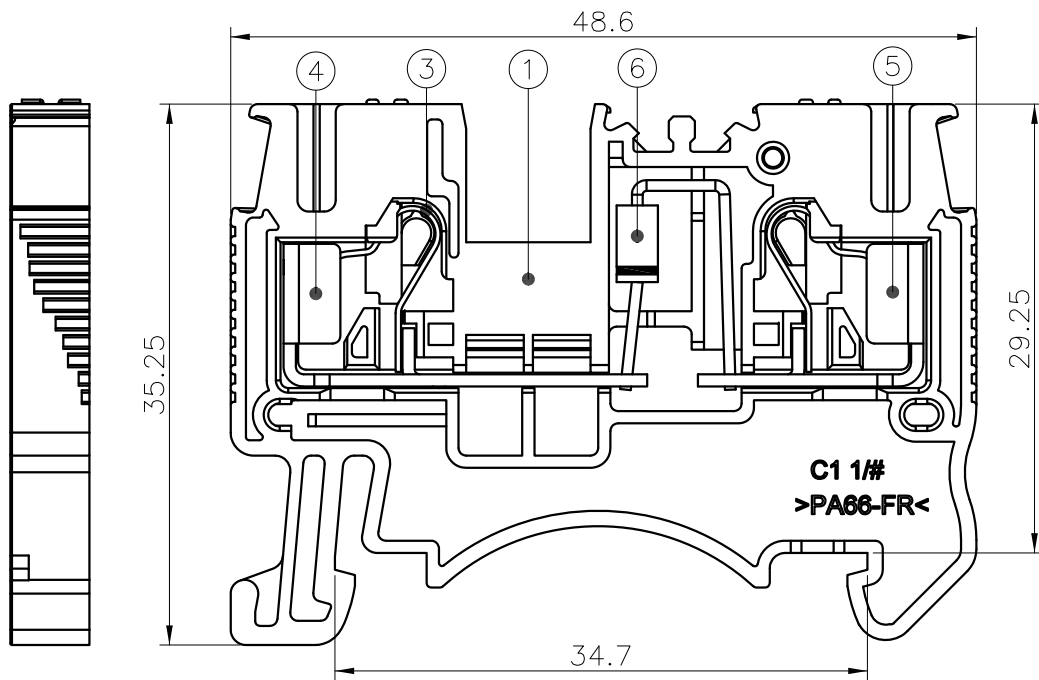



未注公差/General tolerances(mm)												D 0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~	6	10	18	30	50	80	120	180	250	315	400	500	>500
±0.17	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.09	±1.15	±1.60	±2.20	±2.50
额定电压/电流/Rated Voltage(V)/Current(A)												250/1A	
最大逆向电压/Rverse Voltage(KV)												1.3	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)												26-12/0.2-2.5&4(sol)	
间距/Pitch(mm)												5.2	
剥线长度/Stripping length(mm)												10-12	
使用温度范围/Operating temperature(°C)												-40~+105	
符合RoHS环保要求/Conform to RoHS												Yes	

1.Font:Arial
2.Color:Black

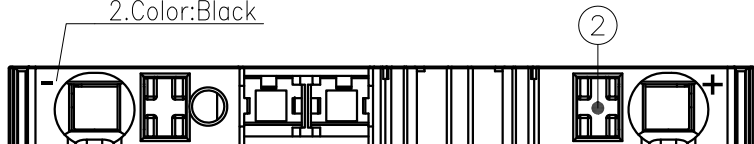

1.Font:Arial
2.Color:Black

6	Diode	/	/
5	Current_carrier 2	Copper	Sn Plated
4	Current_carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

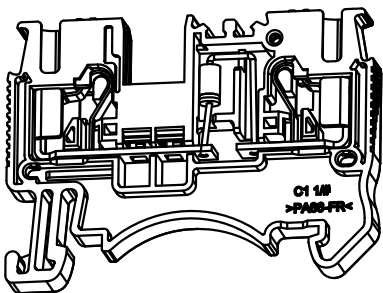

		MATERIAL: /		SURFACE: /	
		MAT. NO./REV: /		MAT. STATUS: /	
APPD: LIGL	2021.08.16	NAME			
CHKD: MoEK	2021.08.12	DS2.5-LD R-L-01P-IY-00A(H)			
DRFT: MIS	2021.08.12	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		/	CUSTOMER DRAWING	/	2:1
00	/	/		MIS	2021.08.12
REV	ECN	DESCRIPTION		DRFT	DATE

00	/	/		MIS	2021.08.12
REV	ECN	DESCRIPTION		DRFT	DATE

Transfer or Distribution of this Equipment as well as the utilization of any part of its components in any form or by any means without the prior written consent of the manufacturer is prohibited. All rights reserved for patent and/or trademark applications. 未经授权，不得复制或传播本文件内容。本公司保留涉及发明、实用新型和外观设计的所有权利。