


未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	300/20	600/5
IEC 标准/IEC Standard:			
过压类别/Ovoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
最大负载电流/Maximum load current	24A (具有4mm <sup>2</sup> 导线横截面, 刚性 (with 4 mm <sup>2</sup> conductor cross section, rigid))		
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm <sup>2</sup> )	26~12 / 0.2~2.5&4(sol)		
间距/Pitch(mm)/线数范围/Poles	5.2/N=01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

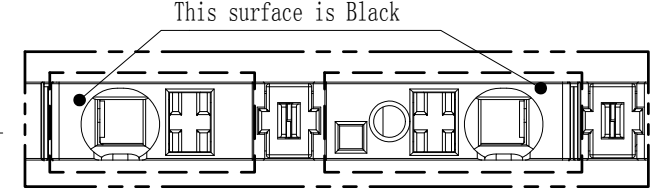

ITEM	NAME OF PART	MATERIAL	NOTES
8	Housing2	PA66	UL94 V-0
7	Current carrier4	Copper	Sn Plated
6	Current carrier3	Copper	Sn Plated
5	Current carrier2	Copper	Sn Plated
4	Current carrier1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing 1	PA66	UL94 V-0

<b>DEGSON</b>		MATERIAL: /	SURFACE/COLOR: /	
		MAT NO./REV: /	MAT STATUS: /	
APPD: Li GL	2022.06.06	NAME		
CHKD: Ma EK	2022.06.06	DS2. 5-3L-PV-01P-1Y-00A (H)		
DRFT: Liu CB	2022.06.06	DRAWING NO. /	TYPE	DRAWING STATUS
		CUSTOMER DRAWING		SCALE
				SHEET
				1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	/	Liu CB	2022.06.06

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by the copyright owner. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、软件著作权等权利外，其他权利均归权利人所有。未经许可，不得复制或传播本文件内容。