

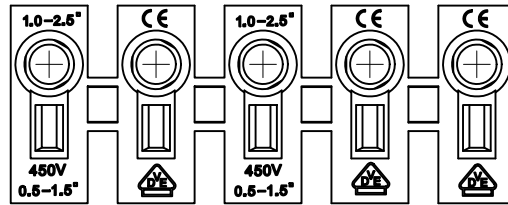
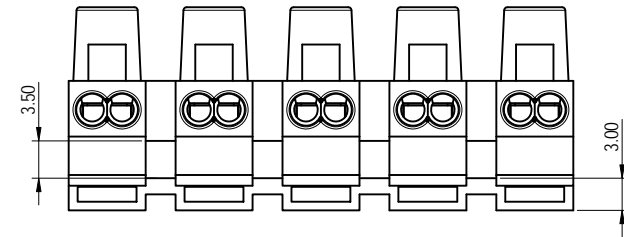
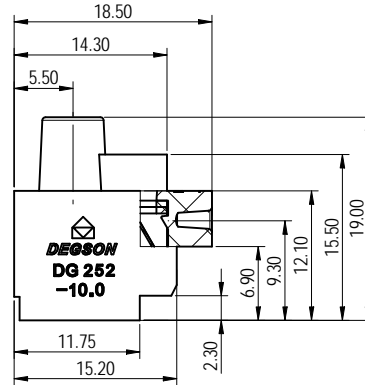
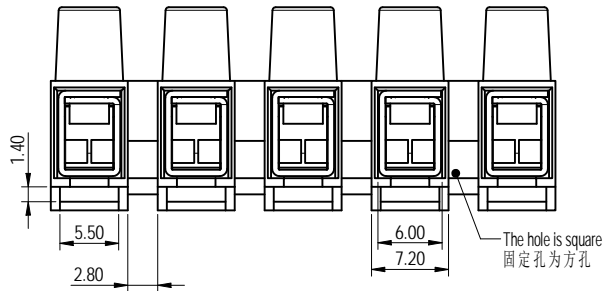


公差/General tolerances (mm)											D			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	~ >500	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

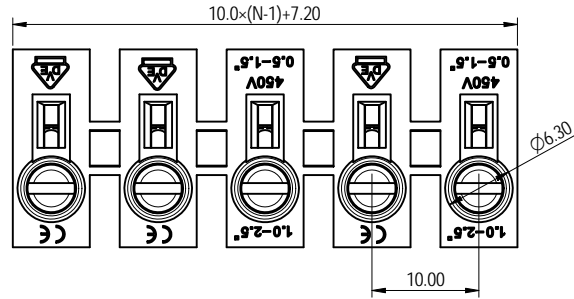

(2XX+1)P
The last two lines
lettering are the same

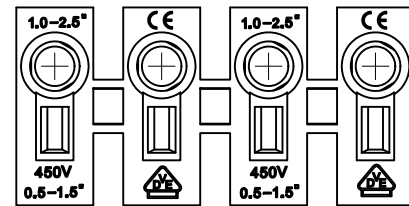

(2XX)P
The last two lines
lettering are the different

Note: The A&Z (H) in the name means: A (H) and Z (H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Cage	Steel	Zn Plated
2	Screw	Steel	Zn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	450/17.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3.5: 0.4/3.54		
线径范围(硬线和软线)/Wire Range (rigid and flexible)(AWG/mm²)	Screwless: 0.5~1.5mm² 22~16AWG Screw: 1.0~2.5mm²		
间距/Pitch(mm)/线数范围/Poles	10.0/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON MATERIAL: SURFACE/COLOR: / 00 MAT STATUS: 批量

APPD: 曹利彬 2023.02.07 NAME: DG252-XXP-1Y-00A&Z(H)

CHKD: 曹利彬 2023.02.07

DRAFT: 孙科霖 2023.02.07

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200141007	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
00				