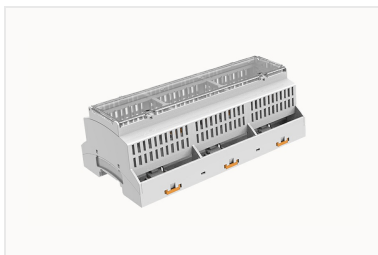


Panoramica

Informazioni sul prodotto

**DGK12-003-13030000005**

Building electronic housing ,length :161.6mm,DIN rail housing ,Can be used in distribution box comply with DIN 43880 standard , Upper housing with vent , IP class:IP20.

Vantaggi del prodotto

- ☒ Modern design
- ☒ flexible PCB connection
- ☒ high-efficiency DIN rail connector is optional
- ☒ Support Wall-mounted installation and distribution power box installation in accordance with DIN 43880 standards

Certificazione del prodotto

Dati tecnici

Disegno del prodotto

Modello 3D

☐

Dimensions

width	161.6mm
length	89.7mm
Height	60.7mm
Depth from top edge of DIN rail	54.7mm

PCB data

Number of PCB holders	27 (Upper cover 18+Base 9)
PCB thickness	1.8mm
Installation location	Vertical &horizontal(DIN rail)
PCBType of installation	Latching

Item properties

IP class	IP20
Connection levels	1(Both sides)
with ventilation openings	Yes
Maximum connection	96 (pitch : 2.5 mm);54 (pitch : 5 mm),36 (pitch : 7.5 mm)

Material data

color	Upper housing: light gray bottom housing: black
Material	PC
Flammability rating	V2

Environmental data

Ambient temperature (assembly)	-5°C ~ +100°C
Ambient temperature (operation)	-40°C ~ +110°C
Ambient temperature (storage / transport)	-40°C ~ +70°C

Accessori

Accessories

--	--

Dati aziendali

numero d'ordine	13030000005
Unità di imballaggio	35
Quantità di ordine minimo	35
Peso dei prodotti (senza imballaggio)	111.4