


Panoramica

Informazioni sul prodotto

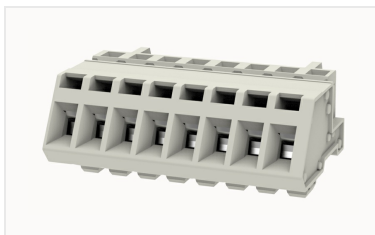

8EDG-STDD-5.0-10020002887

Pluggable Terminal Blocks nominal current 20A. Rated voltage (III/3): 320V, pitch: 5.0mm, Color: grey, Contact surface: Tin

Vantaggi del prodotto

- ☒ Can achieve 90° transfer connection
- ☒ Cage clamp connection technology, fast wiring
- ☒ Panel or Din rail installation, suitable for various situations

Certificazione del prodotto



Dati tecnici

Disegno del prodotto

Modello 3D

□

Connection capacity

Conductor cross section solid	0.2~2.5mm ²
Conductor cross section flexible	0.2~2.5mm ²
AWG	22~14AWG
Strip length	7mm

Electrical parameters UL

Rated voltage (B)	300V
Rated current (B)	15A

Electrical parameters IEC

Rated voltage	320V
---------------	------

Rated current(III/3)	320V
Rated current	20A
Rated surge voltage(III/3)	4KV

Item properties

Connection direction	45°
Type of installation	panel
Pin arrangement	Single row in a straight line
Connection method	spring-cage connection
Pitch	5mm
Number of potentials	8
Pluggable or not	Yes
Number of rows	1

Material data

Environmental items	Compliant with REACH/RoHS
Contact material	Copper alloy
Contact point metal surface	tin-plated
Contact zone metal surface	tin-plated
Insulation Materials	PA66
Insulating material group	I
Flammability rating	UL94V-0

Mechanical tests

Test Specification	IEC61984/ UL1059
--------------------	------------------

Environmental data

Ambient temperature (operation)	-40℃~105℃
---------------------------------	-----------

Accessori

Tool

Screwdriver

/

Operating tool

/

Accessories

Coding strip

/

Bridge

DG018-5.0

Marking strip

/

Others

/

Dati aziendali

numero d'ordine

10020002887

Unità di imballaggio

240

Quantità di ordine minimo

30

Peso dei prodotti (senza
imballaggio)

12.5