



5.00

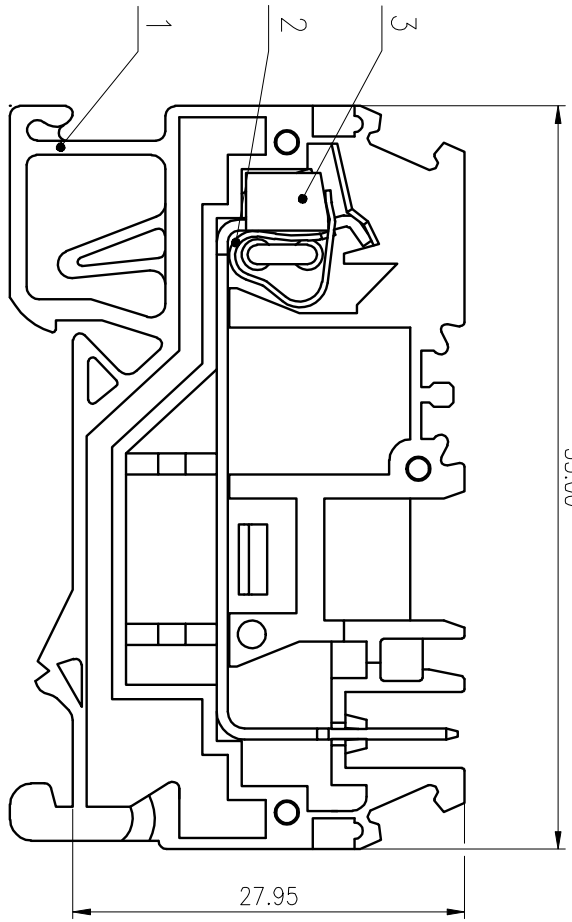


53.00

27.95

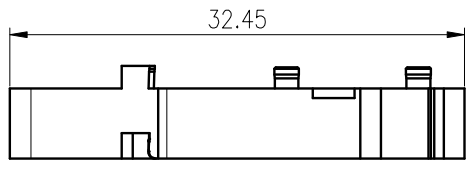

32.45

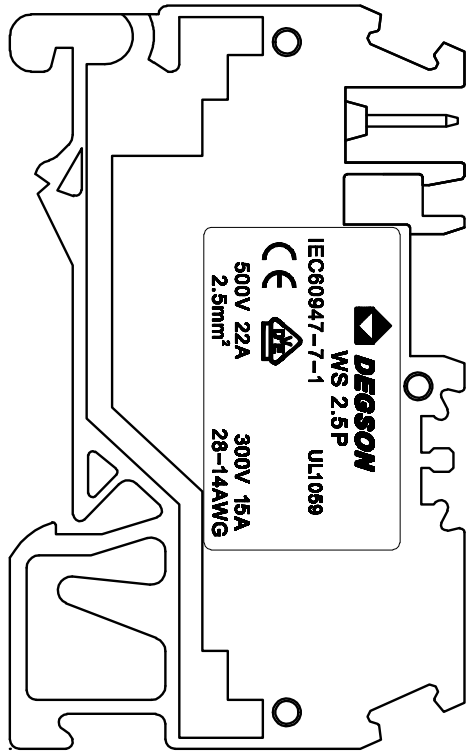

DEGSON
WS 2.5P
UL1056
IEC60947-7-1
500V 22A
2.5mm²
300V 15A
28-14AWG

精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	500	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z

UL 标准/UL Standard:	IEC 标准/IEC Standard:	过压类别/Overvoltage Category/行架等	污染等级/Pollution Degree	额定电压/电压/Rated Voltage(V)/Current(A)	额定脉冲电压(V)/Rate Impulse Voltage(V)	线芯范围(导线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	间距/Pitch(mm)	剥线长度/Stripping length(mm)	使用温度范围/Operating temperature(°C)	符合RoHS环保要求/Conform to RoHS	标准颜色编号/Standard color number:
UL 3	III/3	III/3	2	500/22	4	0.2~2.5/28~14	5.00	9~10	-40~+105	Yes	/
PANTONE / RAL											

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

REV	EEN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL:	SURFACE:
MAT NO.: /	
STATUS: /	
APPD: LIGL 2020.05.28	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Moou 2020.05.28	WS2.5P-01P-1Y-00A(H)
DRAFT:ZhengQG 2020.05.27	DRAWING NO.: WS 2.5P-C01
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 2:1	SCALE: 2:1
	REV
	TO
	1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD